




FOOT SHEARING

FEATURES:

- Ideal for precision shearing of mild-steel up to 16 gauge
- Can also be used on aluminum, brass, copper, lead, plastic, and zinc
- Two-way blade configuration provides twice the cutting life

- 37" & 52" X 16 Gauge
- Front, Side & Back Gauge.
- Use for mild steel, aluminum, copper, brass, zinc, plastic and lead.
- Finger guards.
- High chrome high steel blade.

Specifications	37"x16Gauge	52"x16Gauge
Capacity:16Gauge	37"/1000	52"/1320
Range Back Gauge	30-3/4"	30-3/4"
Range Front Gauge	35"	37-1/2"
packing size	1400x760x1250	1680x760x1150

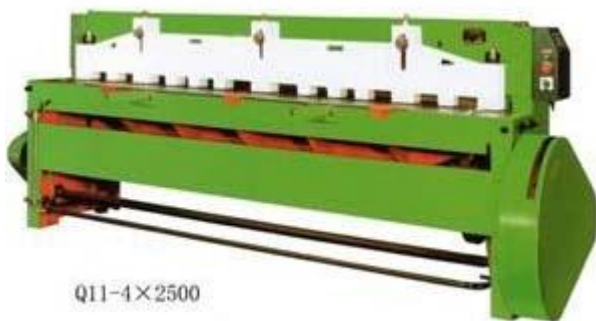



Item	electric shear					
Model	Q11-3X1300	Q11-3X1500	Q11-4X2000	Q11-6X2000	Q11-6X2500	Q11-8X2500
Shearing thickness(mm)	3	3	4	6	6	8
Shearing width(mm)	1300	1500	2000	2000	2500	2500
Shearing angle	2°	2°	2°	2°	1°30	1°42
Num of stroke	20	20	20	20	24	14
Motor power	3	3	5.5	7.5	7.5	11
Back gauge(mm)	350	350	500	500	500	500
Dimension(cm)	212x150x130	232x150x130	320x130x161	310x165x161	380X177X155	388X250X178
Weight(kg)	1500	1700	3100	4300	5300	6729

QH11D shearing machine

A brakemotor driving through a shaft-mounted speed reduction unit and controlled by a selector switch for single or continuous strokes, provides quiet instantenous engagement. Different from the traditional driving method of mechanical shearer, it's one of the most advanced miniature mechanical shearers, and enjoys good reputation both in China and abroad. The low cutting angle and inclined shear direction reduces bowing and twist to a minimum. Blade clearance is easily set by a manually operated Quick Set device, it's an ideal truecut machining equipment of sheet metal and nonferrou sheet metal.

Main specifications

Model	QH11D-3.5x1250	QH11D-3.2x1500	QH11D-3.2x2000	QH11D-2.5x2500	QH11D-3.2
-------	----------------	----------------	----------------	----------------	-----------

Shearing thickness	3.5mm	3.2mm	3.2mm	2.5mm	3.2mm
Shearing width	1250mm	1500mm	2000mm	2500mm	2500mm
Shearing angle	1°30'	1°30'	1°45'	1°	1°18'
Number of stroke	47min ⁻¹	47min ⁻¹	47min ⁻¹	47min ⁻¹	47min ⁻¹
Back gauge range	0-650mm	0-650mm	0-650mm	0-650mm	0-650mm
Height of the table	800mm	800mm	800mm	800mm	800mm
Motor power	5.5KW	5.5KW	7.5KW	7.5KW	7.5KW
Net weight	1450kgs	1650kgs	1800kgs	2080kgs	2200kgs
Size (LxWxH) (mm)	1860x2210x1180	2124x2210x1180	2624x2210x1180	3124x2210x1180	3124x2210x1180