



X6436W/X6432W/X6432BW/WX6430W Universal swivel

X6436V /X6432V/X6432BV/WX6430V Universal swivel head milling machine

Driven by servo motor

Table automatic feed on X Y Z


Automatic rapid feed on X Y Z

specifications		X6436W	X6432W	X6432BW	X6430W
Worktable size	Width (mm)	360	320	320	300
	Length (mm)	1325 /1600		1270/1370	
Worktable travel	Longitudinal (mm)	750/1300		720/820	
	Cross (mm)	320		300	
	Vertical (mm)	400		400	
Spindle taper		7:24 ISO50(V) 7:24 ISO50(H)		7:24 ISO40(V) 7:24 ISO40(H)	
Arm travel (mm)		550		400	
Distance between spindle nose and table surface (mm)		190-590		220-620	
Distance between horizontal nose and table surface (mm)		20-420		35-435	
Distance between spindle axis and arm surface (mm)		200		180	
Spindle speed (steps) (rpm)		60-1750 /12 (V) 60-1800/12 (H)		45-1660 /11 (V) 35-1500/12 (H)	
T- slot (Number/Width/Distance) (mm)		3/18/80	3/18/70	3/14/80	
Worktable swivel angle		±45°			
Main motor (Kw)		5.5 (V) 4 (H)		2.2 or 3 (V) 3 (H)	
Ac servo motor torque (X Y Z) (Nm)		10	10	10	
Overall size	Length (mm)	1800/2520		1720/1820	

	With (mm)	2100	1680
	Hight (mm)	2000	1860
Net weight (kg)		2685/2800	2635/2750
		1875/1925	1850/1900

Universal swivel head milling machine

Driven by servo motor
 Table automatic feed on X,Y,Z
 Automatic rapid feed X,Y,Z
 Rotary swivel table can be ordered at special request

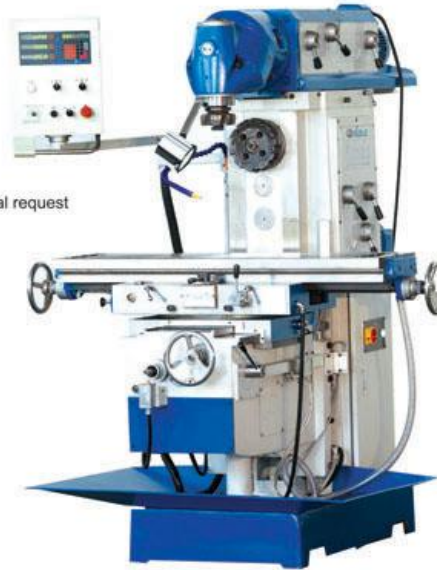

X6232A

C&J
 MACHINE & TOOLS

Apecifications		X6436W	X6432W	X6432BW	X6430W
Worktable size	Width (mm)	360	320	320	300
	Length (mm)	1325 /1600		1270/1370	
Worktable travel	Longitudinal (mm)	750/1300		720/820	
	Cross (mm)	320		300	
	Vertical (mm)	400		400	
Spindle taper		7:24 ISO50(V) 7:24 ISO50(H)		7:24 ISO40(V) 7:24 ISO40(H)	
Arm travel (mm)		550		400	
Distance between spindle nose and table surface (mm)		190-590		220-620	
Distance between horizontal nose and table surface		20-420		35-435	
Distance between spindle axis and arm surface (mm)		200		180	
Spindle speed (steps) (rpm)		60-1750 /12 (V) 60-1800/12 (H)		45-1660 /11 (V) 35-1500/12 (H)	
T- slot (Number/Width/Distance) (mm)		3/18/80		3/18/70	
Worktable swivel angle		± 45°			
Main motor (Kw)		5.5 (V) 4 (H)		2.2 or 3 (V) 3 (H)	
Ac servo motor torque (X Y Z) (Nm)		10		10	
Overall size	Length (mm)	1800/2520		1720/1820	
	With (mm)	2100		1680	
	Hight (mm)	2000		1860	
Net weight (kg)		2685/2800	2635/2750	1875/1925	1850/1900